

Fig. 1


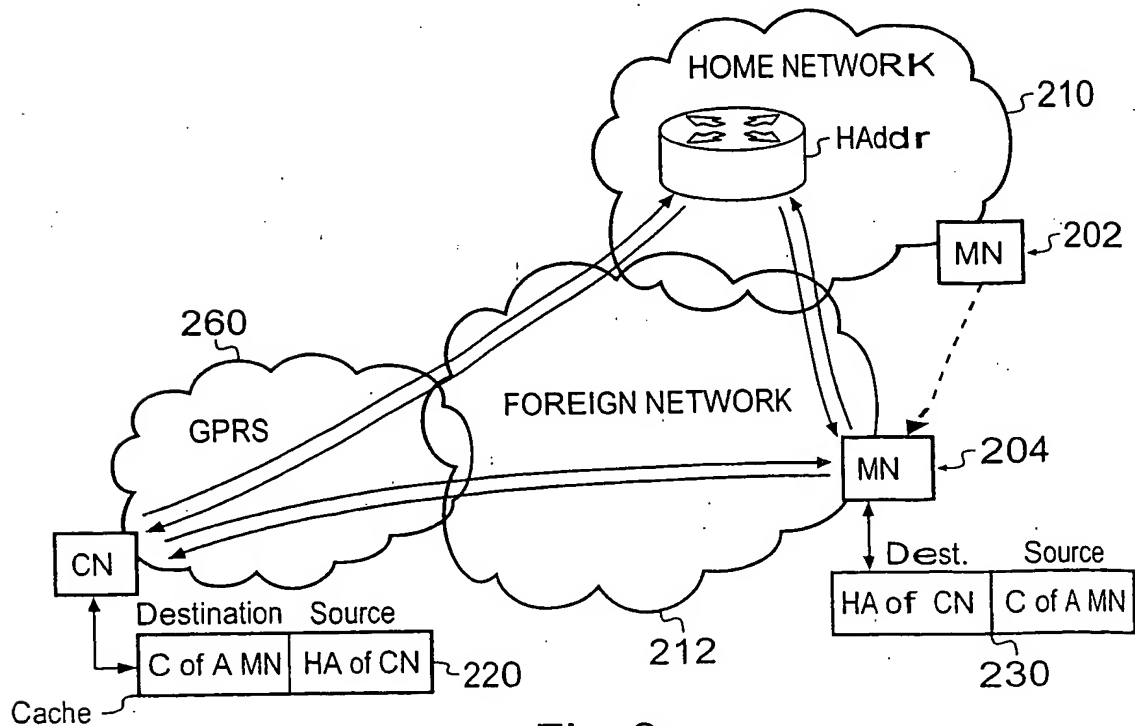


Fig. 2

DOWN-LINK INTERNET PACKET (MN → CN)

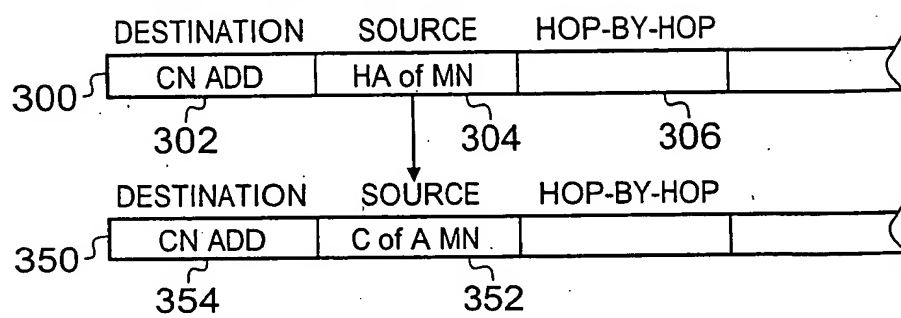

UP-LINK INTERNET PACKET (CN → MN)

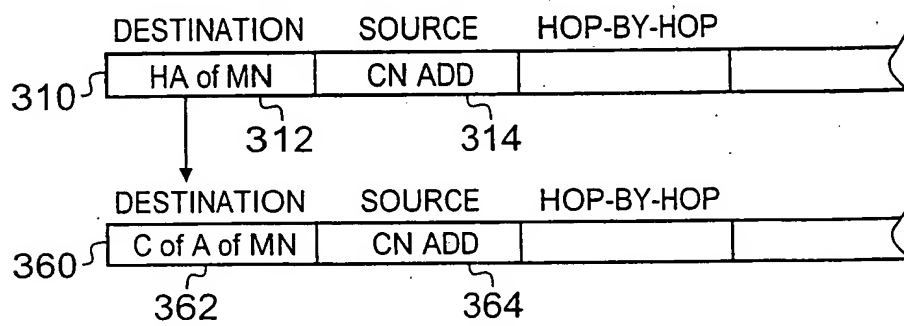


Fig. 3

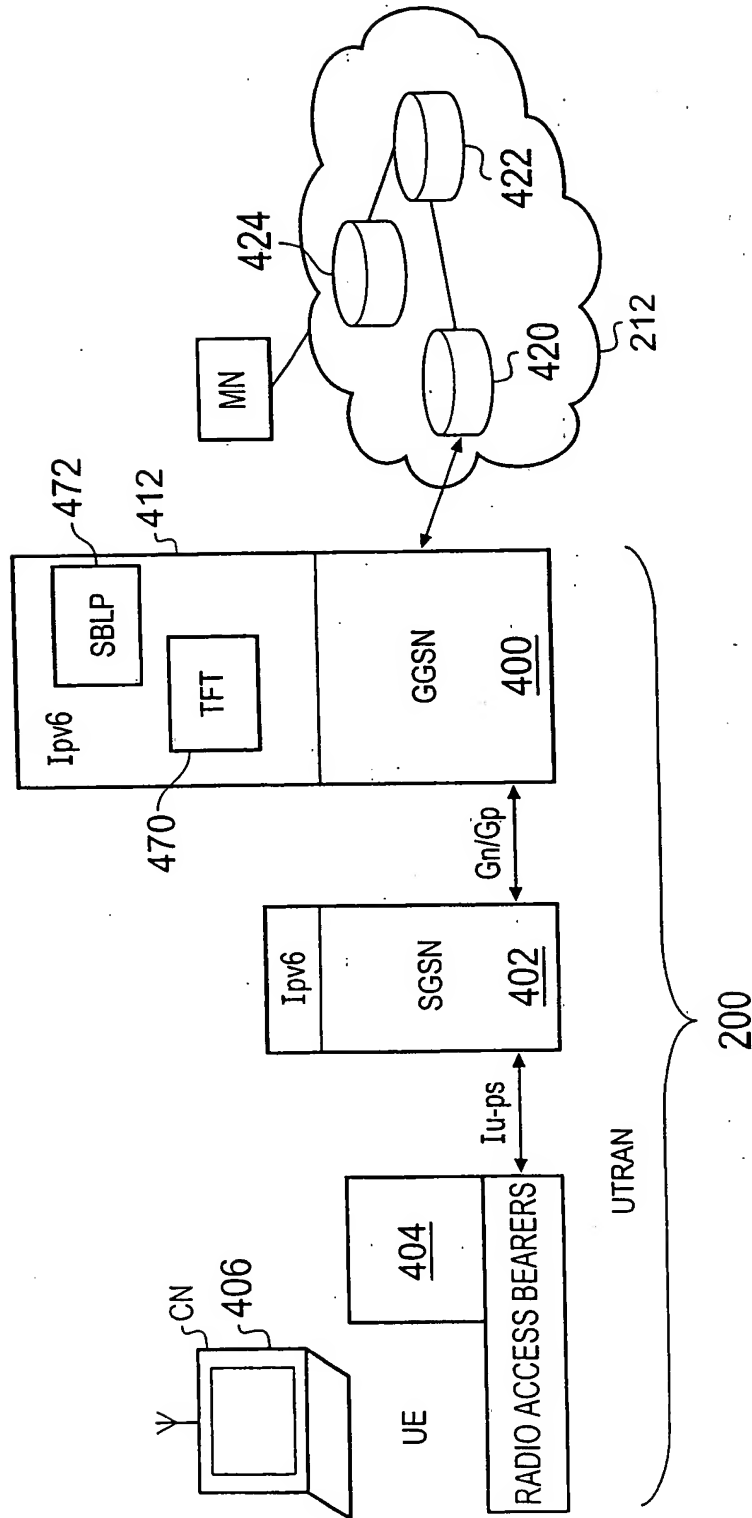


Fig. 4

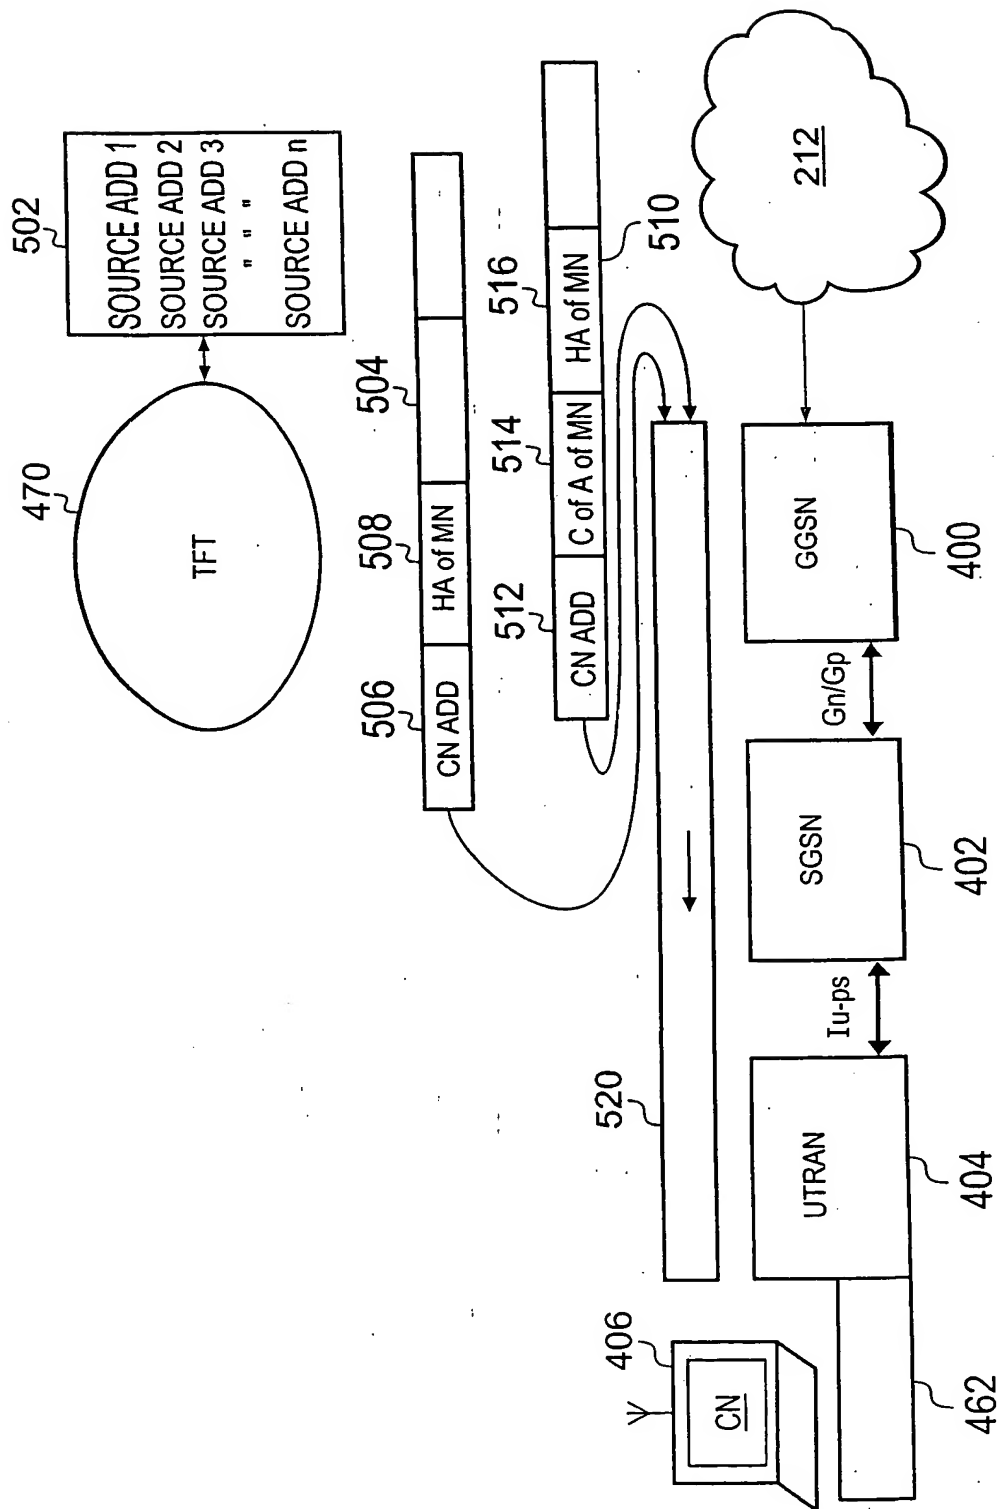


Fig. 5

Version	<u>601</u>	Traffic Class	<u>602</u>	Flow Label	<u>604</u>
Payload Length	<u>606</u>	Next Header Hop-by-hop option = "0"	<u>610</u>	Hop Limit	<u>608</u>
<u>612</u>	Source Address		<u>614</u>	Destination Address	
Next Header	Header Extension Length	Router Alert Value = "0"	Hop-by-hop option type, Value = "5"	Value = "2" or "3" For GGSN Mobility	
<u>616</u>	<u>620</u>	<u>622</u>	<u>624</u>	<u>626</u>	
Source / Destination Home Address of Mobile Node					
<u>628</u>					

618

618

Fig. 6

6/10

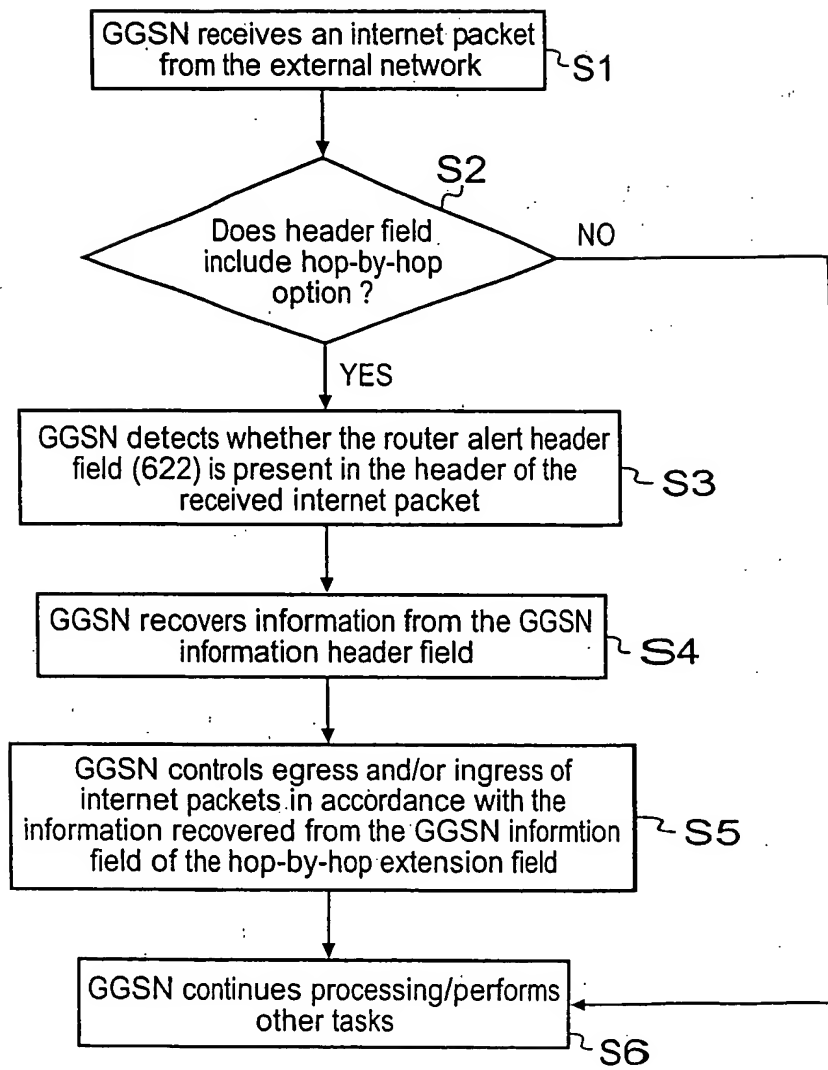


Fig. 7

7/10

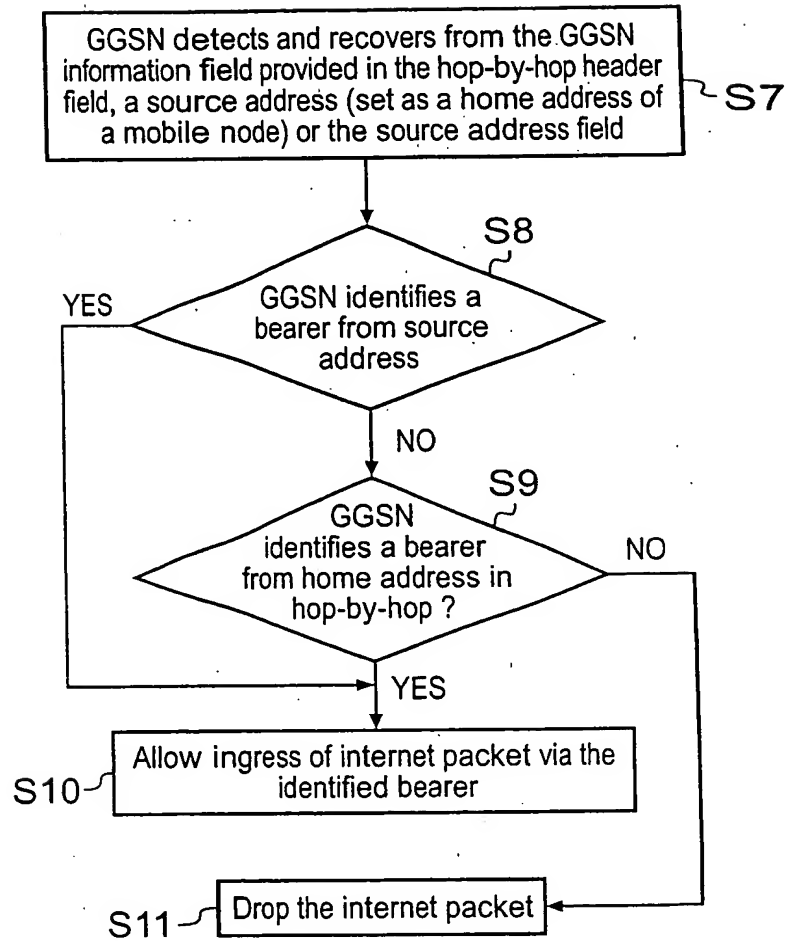


Fig. 8

8/10

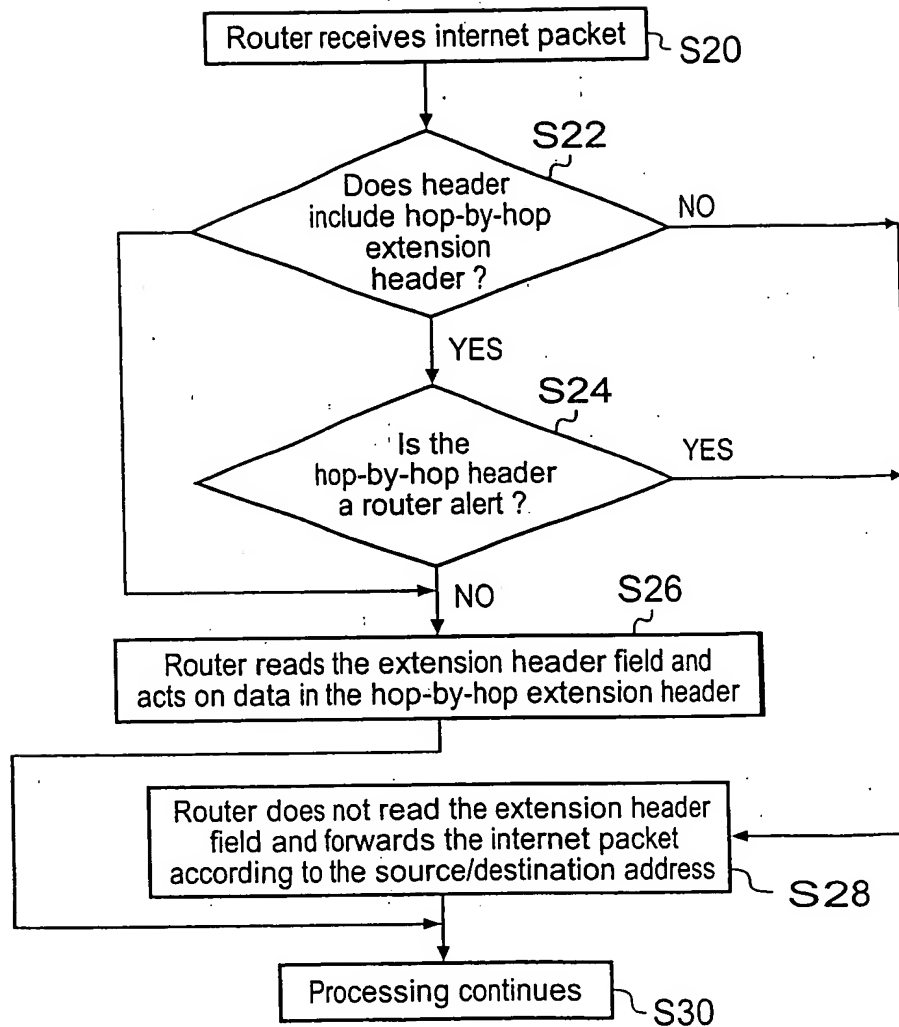


Fig. 9

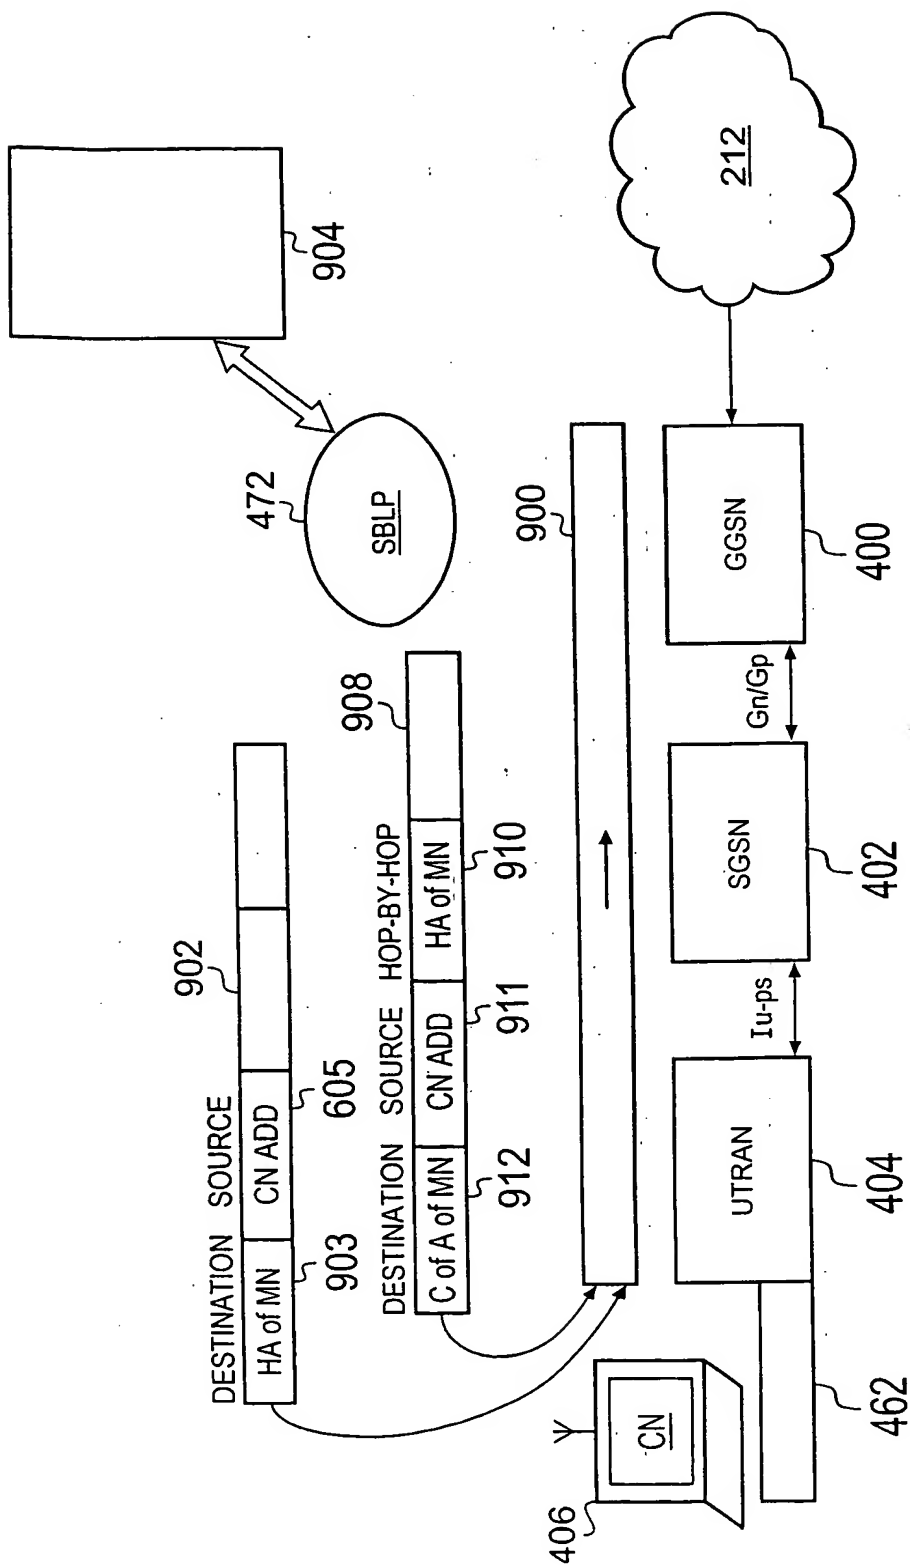


Fig. 10

10/10

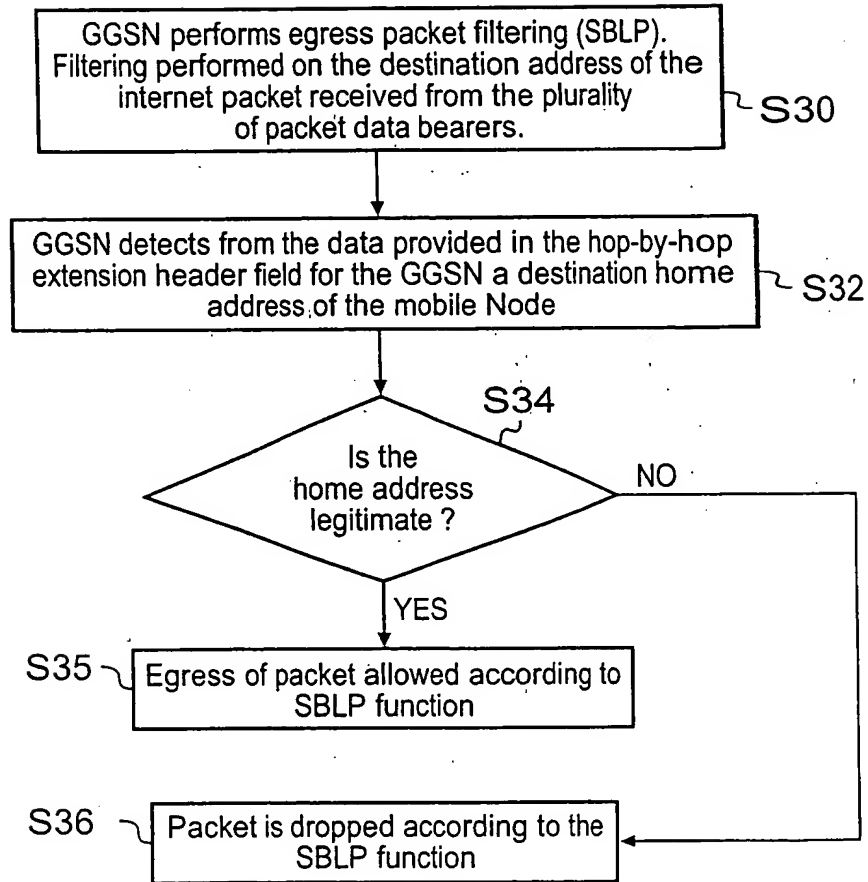


Fig.11